



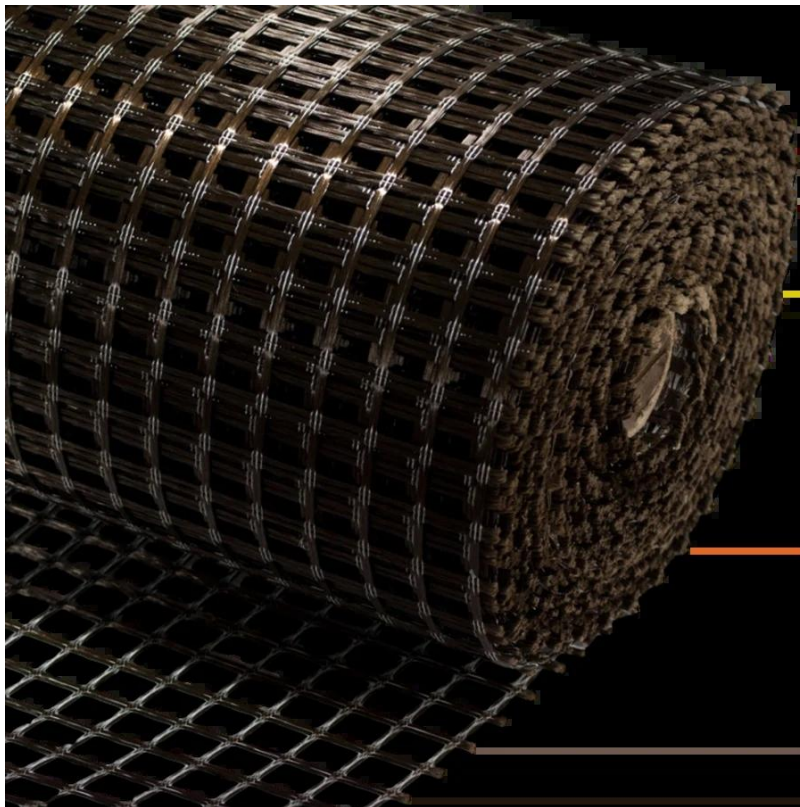

Kingwell Fibre

Kingwell Fibre Materials Co.,Ltd

23.2, Basalt Mesh

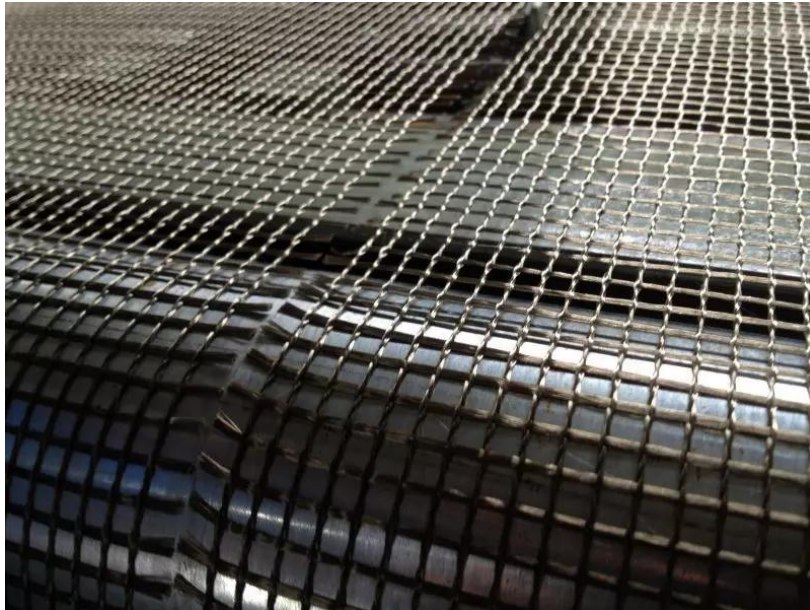

Make the gridding with basalt fiber, then form to geogrid after surface impregnating and drying.



Kingwell Fibre

Kingwell Fibre Materials Co.,Ltd

Shrinkage cracking in low temperature resistance, No long-term creep, it has good thermal stability.

High tensile strength, low elongation, it can prevent the asphalt pavement from cracks. Stable physical and chemical property, it can withstand bio-erosion and climate change.

Specification	Mesh count(Center distance of mesh), mm		Breaking strength(KN/m), \geq		Breaking elongation(%), \leq	
	Weft	Warp	Weft	Warp	Weft	Warp
BFG1*1(40*40)	1+/-0.15	1+/-0.15	40	40	4.0	4.0
BFG1*1(60*60)	1+/-0.15	1+/-0.15	60	60	4.0	4.0
BFG1*1(70*70)	1+/-0.15	1+/-0.15	70	70	4.0	4.0
BFG1*1(90*90)	1+/-0.15	1+/-0.15	90	90	4.0	4.0
BFG1*1(110*110)	1+/-0.15	1+/-0.15	110	110	4.0	4.0